

## AC Current transducer AK-C420L

$I_{PN} = 2..200A$

Transducer for the electronic measurement AC sinusoidal waveforms current, with galvanic isolation between the primary (High power) and the secondary circuits (Electronic circuit). Jumper selectable ranges and 4-20mA current output.



### Electrical data

Primary Nominal Current $I_{PN}$ (A.t.RMS)	Analogue Output Signal <sup>1)</sup> $I_{OUT}$ (mA)	Type
2,5	4-20	<b>AK 5 C420L</b>
10,20,50	4-20	<b>AK 50 C420L</b>
100,150,200	4-20	<b>AK 200 C420L</b>
$V_c$ Supply voltage (Loop powered)	24	V DC
$R_L$ Load resistance	see power supply diagram	
$V_d$ RMS Isolation voltage test, 50 Hz, 1mn	5	kV AC
$f$ Frequency bandwidth	20-100	Hz

### Accuracy - Dynamic performance data

X	Accuracy @ $I_{PN}$ , $T_A=25^\circ C$	$\pm 1$	%
$t_r$	Response time @ 90% of $I_{PN}$	< 300	mS

### General data

$T_A$	Ambient operating temperature (0-95% RH)	-20..+50	$^\circ C$
$T_S$	Ambient storage temperature	-20..+85	$^\circ C$
m	Mass	120	g

**Note:** <sup>1)</sup> For 4-20mA output model, no saturation output up to 25 mA

### Features

- AC sinusoidal Measurement
- Average responding
- Current output
- Loop powered transducers
- Panel mounting
- Accurate
- Jumper selectable ranges

### Advantages

- Large aperture
- High isolation between primary and secondary circuits
- Easy to mount


### Applications

- Automation systems  
Analog current reading for remote monitoring (e.g. motor).
- Data loggers  
Self-powered transducer does not drain data logger batteries.
- Panel meters  
Simple connection displays power consumption.

### Options on request

- DIN mounting

## Dimensions AK-C420L (unit : mm, 1mm = 0.0394 inch)

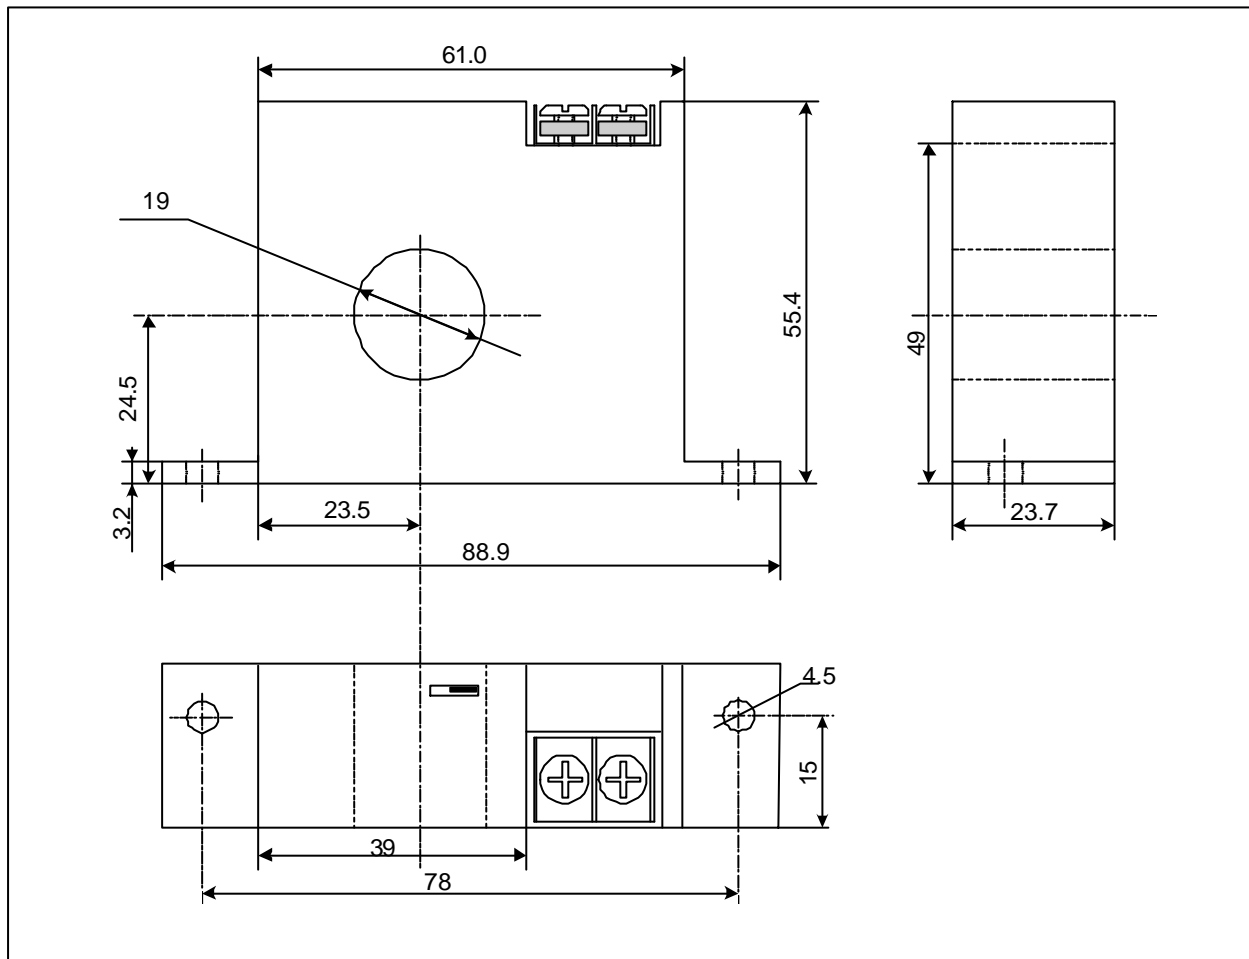


### Mechanical characteristics

- General tolerance  $\pm 1$  mm
- Primary aperture 19 mm
- Panel mounting 2 holes  $\varnothing 4.5$  mm  
Distance between holes 78 mm

### Connections

- 2 x UNC8 Cylindric Head

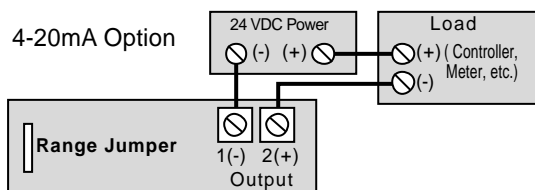

- Notes:
- Captive screw terminals.
  - 12-22 AWG solid or stranded.
  - Observe polarity.

### Power Supply diagram

